

Specifier's Reference
Project
Type
Model No.
Comments or Special Instructions

ILL-PA-22 END FITTING SPECIFICATION

APPLICATION

A small round paver manufactured from stainless steel with clear glass which is designed to be used with a 6mm smooth ferrule which is milled at a 30° angle. This allows the light to be guided diagonally.

An M3 grub screw is used to secure the ferrule into the paver. An optional mounting spring can be used to secure this fitting in a ceiling, hollow wall or floor.

Our paver fittings are suitable for use in a variety of different applications and are the ideal solution to floor level lighting both indoors and outside.




Uses include:

- Marker lighting for pathways and entrances
 - Wall washing, inside or out
 - Uplighting columns or archways
 - Mood lighting in any room in the house, including wet rooms and pool areas
- Paver fittings can be installed in many surfaces including wooden floors, decking, paving, stair skirting and concrete.



SPECIFICATION

Glass: Ø14mm clear glass
 Beam Angle: 54°
 Material: Stainless steel
 Colours available: Natural
 Flange size: Ø31 mm
 Weight: 46.6g
 Mounting hole size: Ø22 mm
 Ferrule size: 6mm smooth
 Min. Fibre size: Ø2 mm
 Max. Fibre size: Ø5 mm
 Protection rating: IP44

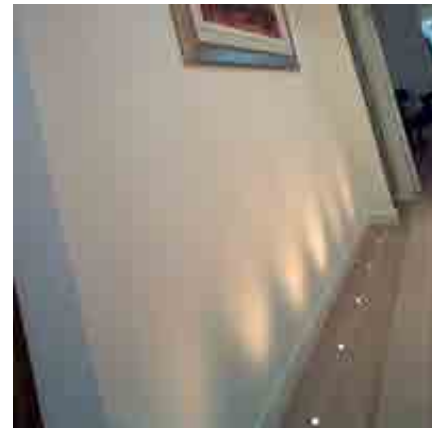

Ordering Information

ILL-PA-22CG (clear glass)

